


HOW TO OPERATE YOUR LOCK?


- The factory preset combination is 0-0-0-0, even though the dials may appear in other numbers.

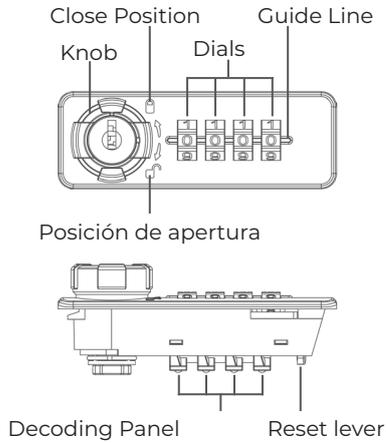

TO OPEN:


Turn the dials and align the opening combination numbers with the Guide Line.

Turn the knob to the open position

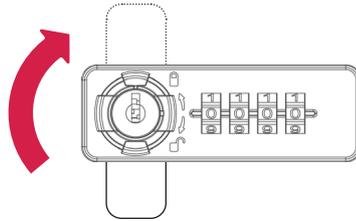

TO LOCK:

Turn the knob to the close position

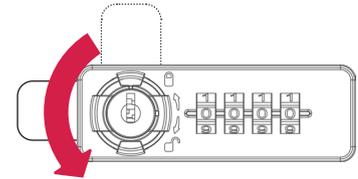


OPERATING INSTRUCTION VIDEO



- Due to various cabinets, you may need to turn the "knob" 90° or 180° to operate your lock.

HOW TO RESET YOUR COMBINATION?


1. Leave the dials at preset combination 0-0-0-0 (Fig. A).
2. Turn the Knob to the open position (Fig. B)
3. Push the Reset Lever on the back of lock from "A" to "B" position (Fig. C). Set your own desired combination.
4. Return the Reset Lever back to "A" position (Fig. D). Your lock is now ready to open at its new combination.




(Fig. A)



(Fig. B)




(Fig. C)



(Fig. D)

HOW TO THE FORGOT COMBINATION?

- Press down the Decoding Panel, Keep holding it and rotate the dial till the Decoding Panel sinks or there is a "click" sound. (Fig. E). Repeat the same process for all dials, you will get the opening numbers

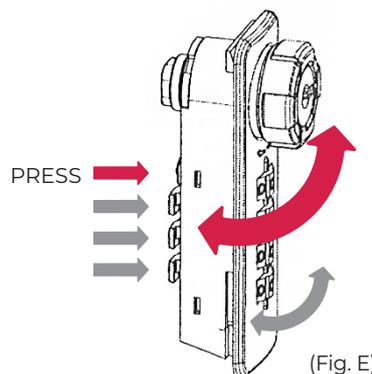

(Fig. E)

- The Master Key operation may be used at any time to open a lock in an emergency.
- Always keep your secret combination in a safe and accessible place for future reference.